


## Top Loading Autoclave Range

95, 120, 135 litre models

*Fitted with heaters in chamber as standard*

Astell's top loading autoclave range is available in three sizes and is factory fitted with a large number of features as standard, making it suitable for sterilizing liquids (media), discard, glassware and other instruments. These features include:

- A 5.7" colour touchscreen with integrated USB data port
- A delayed start and a media holdwarm feature for greater control over when you want to sterilize
- Safety: over-temperature protection, an external pressure gauge, a cooling lock, a safety valve test program and an emergency stop button
- A validation port, drain valve and an electropolished stainless steel chamber
- Castor mounted for easy movement
- Timed/Pulsed Freesteaming
- Full range of options and accessories (see overleaf for details)



### Specifications

| Model no. | Steam source                      | Volume (litres) | Power supply  | Chamber diam. x depth (mm) | Usable chamber depth (mm) | Overall dimensions W x H x D (mm) |
|-----------|-----------------------------------|-----------------|---------------|----------------------------|---------------------------|-----------------------------------|
| AMA250    | Heaters in Chamber                | 95              | 3 Phase, 10kW | 456 x 584                  | 449                       | 660 x 940 x 840                   |
| AMA260    |                                   | 120             |               | 456 x 736                  | 601                       | 660 x 1070 x 840                  |
| AMA270    |                                   | 135             |               | 456 x 817                  | 682                       | 660 x 1150 x 840                  |
| AMA260    | Integral Steam Generator (option) | 120             | 3 Phase, 14kW | 456 x 736                  | 601                       | 660 x 1070 x 1200                 |
| AMA270    |                                   | 135             |               | 456 x 817                  | 682                       | 660 x 1150 x 1200                 |


*(Power consumption/dimensions may vary with the addition of certain options)*

### Bottle capacity

Below is a table identifying the number of Duran bottles it is possible to fit in to the chamber of each model. The number in brackets indicates the quantity of stainless steel baskets (Ref: AAN042) required to achieve this.

| Model no. | 500ml  | 1000ml  | 2000ml  |
|-----------|--------|---------|---------|
| AMA250    | 30 (2) | 10 (1)  | 5 (1)   |
| AMA260    | 30 (2) | 20 (2)* | 10 (2)* |
| AMA270    | 45 (3) | 20 (2)* | 10 (2)* |

\* (As the Duran bottle height exceeds the basket height, in this configuration the second basket would rest on top of the bottles in the lower basket).

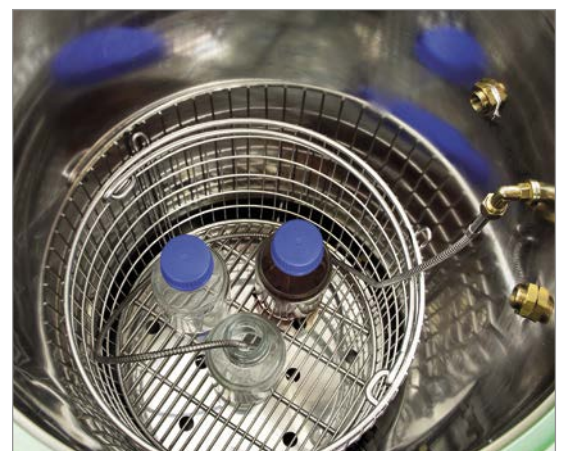

## Advanced options (Selection of these options alters the power supply requirements listed in the Specifications table)



### Integral Steam Generator Option

The standard heaters in chamber are replaced with a 12kW integral steam generator. This option helps to improve cycle times by increasing the efficiency of steam production (a mains water supply is required for this option). Astell Ref: 12KWWSG



### Advanced and Simple Vacuum Options

A vacuum option is essential for porous type loads (e.g. wrapped instruments and fabrics) or other cycles where air pockets could easily become trapped within the load. Available in 2 derivatives, the AVC001 option is Astell's advanced pulsar vacuum, which when used in conjunction with the integral steam generator and a heated jacket enables the dry output of all loads. Alternatively, the AVC002 vacuum utilises the standard heaters in the base of the chamber with simple pre-vacuum air removal and post vacuum cooling to effectively sterilize porous type loads and difficult 'discard' loads, but without any drying capability. Astell Ref: AVC001 or AVC002



### External Jacket Option

Requiring the steam generator or direct steam option (and normally in conjunction with the AVC001 vacuum option), the external jacket option effectively adds an additional layer to the outside of the autoclave chamber. This can then be independently heated by the steam generator to enhance the drying process at the end of the cycle, or it can be flooded with water during cooling to aid faster cooling times. Astell Ref: AJP150

## Additional options

|  |              |
|--|--------------|
| Load Sensed Process Timing                 | Ref: AAR014  |
| Pulsar Freesteamer                         | Ref: AAN009  |
| Integral data printer                      | Ref: AAR130  |
| FDA 21 CFR part 11 controller software     | Ref: CFR021  |
| Remote maintenance/diagnosis               | Ref: RDM101  |
| Ethernet interface                         | Ref: AAR122  |
| IQ/OQ documentation                        | Ref: IQ/OQ   |
| Assisted air cooling                       | Ref: AAP006  |
| Advanced water cooling                     | Ref: AAP080  |
| Autodrain (heaters in chamber models only) | Ref: AAP018  |
| Autofill (heaters in chamber models only)  | Ref: AAP019  |
| Air ballast (requires compressed air)      | Ref: AVC004E |

|   |                 |
|---|-----------------|
| Drain Cooling (heaters in chamber model only) | Ref: AAN420     |
| Category III (BSL-3) compliance               | Ref: AVQ006     |
| Stainless steel basket (D:400 x H:220mm)      | Ref: AAN042     |
| Stainless steel basket (D:400 x H:400mm)      | Ref: AAN036     |
| Morrison discard container (D:390 x H:355mm)  | Ref: AAN058     |
| Morrison discard container (D:390 x H:500mm)  | Ref: AAN056     |
| Water softener (compact)                      | Ref: AAW002     |
| Load support plate                            | Ref: AAN002     |
| Direct Steam model                            | Ref: Various    |
| Blow down vessel                              | Ref: AAB001     |
| Air compressor                                | Ref: AAQ503/525 |
| Lifting hoist                                 | Ref: HST040     |

## Options capacity

| Part name                  | Part ref. | Dimensions: Diameter x Height (mm) | AMA250 | AMA260 | AMA270 |
|----------------------------|-----------|------------------------------------|--------|--------|--------|
| Stainless steel basket     | AAN042    | 400 x 220                          | 2      | 2      | 3      |
| Stainless steel basket     | AAN036    | 400 x 400                          | 1      | 1      | 1      |
| Morrison discard container | AAN058    | 390 x 355                          | 1      | 1      | 1      |
| Morrison discard container | AAN056    | 390 x 500                          | -      | 1      | 1      |

## Installation requirements

### Power requirements:

The power requirements for the standard machines are listed in the Specifications table, however these can vary depending on the options selected. Options that affect the power requirement are **Integral Steam Generator** and **Advanced and Simple Vacuum**. For details on the exact power requirements on these options please contact us. *N.B. A Neutral line and protective Earth are required for all electrically heated units.*

### Water and drainage requirements:

A cold water supply of 2-6 Bar minimum, 4 litres/min is required for the 'Autofill', vacuum and water cooling options. Max temperature 25°C, Max flow rate 20 litres/min. Requirements vary for RO/de-ionised/hard water. Drainage: Free venting, non-manifolded drain (35mm diameter) capable of withstanding temperatures up to 100°C.



Astell Scientific Ltd, Powerscroft Road, Sidcup, Kent DA14 5DT, UK

Tel: +44 (0)20 8309 2031 E-mail: info@astell.com

Astell Scientific Ltd is a company registered in England. Registered no. 487717.